

GRAFKOTE® Non-Metal Reinforced Laminate


TECHNICAL DATA SHEET 144

Product Family - Laminates (Non-Metal Reinforced)


- GHP - GTB with Plastic Insert
- GHN - TG-337 with Plastic Insert
- GHW - GTB with Woven Glass Fiber Insert
- **GRAFKOTE® - GTB with Plastic Facing**

Applications

- Valves
- Pumps
- Pipe Flanges/ASME/API/
DIN flanges
- Compressors
- Glass-lined or low load
flange equipment
- Steam traps
- Heat exchangers

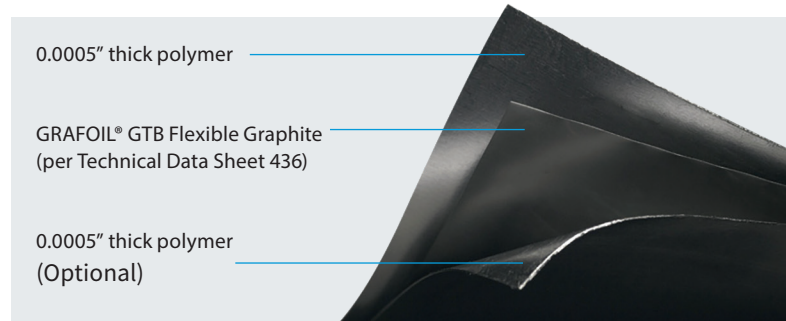


SEALABILITY (MODIFIED DIN3535)

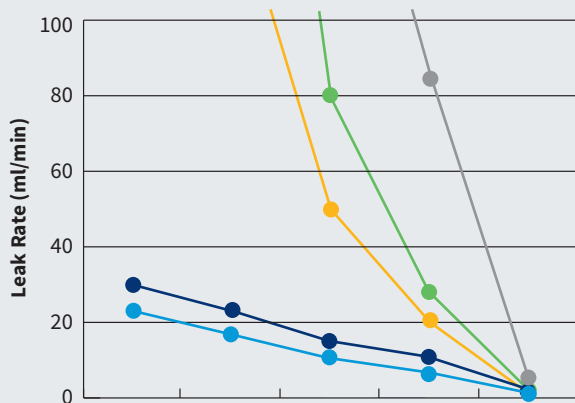


- 1.5 mm Double Sided GRAFKOTE®
- 1.5 mm Single Sided GRAFKOTE®
- 1.5 mm Compressed nonasbestos NBR/Aramid fibers
- 1.5 mm Compressed nonasbestos SBR/Aramid fibers
- 1.5 mm Compressed nonasbestos NBR/synthetic fibers

LOAD BEARING ABILITY
High Temperature Creep Relaxation (BS1-F125)

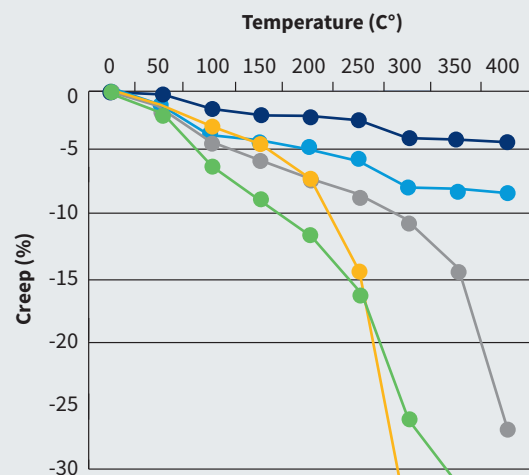

- 1.5 mm Double Sided GRAFKOTE®
- 1.5 mm Single Sided GRAFKOTE®
- 1.5 mm Compressed nonasbestos NBR/Aramid fibers
- 1.5 mm Compressed nonasbestos SBR/Aramid fibers
- 1.5 mm Compressed nonasbestos NBR/synthetic fibers

PT Guidelines

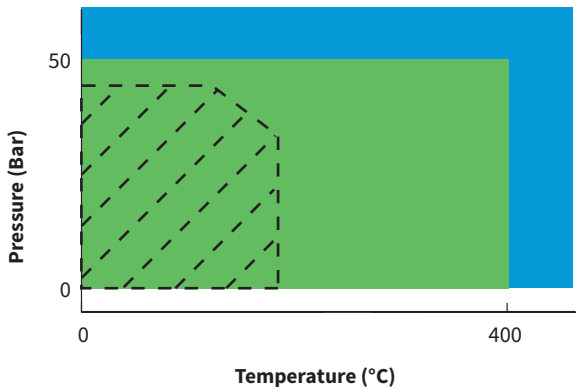

GRAFKOTE® material P×T: 8,662,500

- Recommended for non-asbestos fiber sheet
- Recommended for GRAFKOTE products
- Not recommended for GRAFKOTE products

The pT Guidelines chart offers general recommendations for gasketing materials, based on pressure and operating temperature. This information is offered only as a guideline and should not be viewed independently from application environment, chemical compatibility and gasket thickness.

Advantages of GRAFKOTE® Non-Metal Reinforced Laminate

- Compatible with a wide range of chemicals
- Maximum continuous use temperature 400°C (750°F)
- No shelf life
- Material availability in rolls allows for maximum material utilization
- Easily cut
- Improved handleability, durability
- Superior to non-asbestos fiber sheet in every characteristic (Creep, Recovery and Sealability)

Typical Properties*

CHARACTERISTIC	TYPICAL VALUE
Thickness of Laminate	0.030" (0.76 mm) for Single-Sided 0.060" (1.52 mm) for Single-Sided 0.062" (1.57 mm) for Double-Sided
Width	39.4" (1000 mm)
Length	39.4" (1000 mm) 100' (30.5 m)
Bulk Density (Graphite)	70 lb/ft ³ (1.12 g/cc)
Application Temperature	400°C (750°F) Maximum for > 0.030" 200°C (750°F) Maximum for < 0.020"
Compressibility at 5000 psi (35 MPa) load	43%
Recovery after 5000 psi (35 MPa) load	20%
Creep Relaxation Method: BSI-F125 at 6391 psi (44.1 MPa) load up to 400°C	<4% for 70 lb/ft ³
Tensile Strength	800 psi (5.5 MPa) for ≥ 0.030" Thick 950 psi (6.6 MPa) for 0.010" Thick
Pressure classes	ASME 150, ASME 300, PN20, PN50
Certification	Certify to Grade

ASTM IRM 903 OIL (5 HRS AT 150°C)	50/50 WATER GLYCOL (22 HRS BOILING)	FUEL B (5 HRS AT ROOM TEMP)
Thickness Change: 2%	Thickness Change: 3%	Thickness Change: 5%
Weight Change: 30%	Weight Change: 50%	Weight Change: 33%
ASTM IRM OIL 1 (5 HRS AT 150°C)	DISTILLED WATER (5 HRS AT 100°C)	
Thickness Change: 3%	Thickness Change: 1.5%	
Weight Change: 38%	Weight Change: 40%	

ASME Gasket Factors

- “m” Factor: 2
- “y” Stress: 900 psi (6.22 MPa)
- Max Gasket Unit Load: 6,526 psi (45 MPa)

+1 (800) 253.8003 (Toll-Free in USA) | +1 (216) 529.3777 (International)
www.neograf.com | info@neograf.com

©2020 NeoGraf Solutions, LLC (NGS). This information is based on data believed to be reliable, but NGS makes no warranties, express or implied, as to its accuracy and assumes no liability arising out of its use. The data listed falls within the normal range of product properties, but should not be used to establish specification limits or used alone as the basis of design. NGS's liability to purchasers is expressly limited to the terms and conditions of sale. eGRAF®, NeoNxGen™, SPREADERSHIELD™, HITHERM™, GRAFGUARD®, GRAFOIL®, GRAF+® and GrafHX® are registered trademarks of NeoGraf Solutions, LLC. eGRAF®, NeoNxGen™, SPREADERSHIELD™, HITHERM™, GRAFGUARD®, GRAFOIL®, GRAF+® and GrafHX® products, materials, and processes are covered by several US and foreign patents. For patent information visit www.neograf.com.